


Ball valves

Model 50075 3-part ball valve for butt welding (BW) (58192) with stainless steel pneumatic actuator (50802)

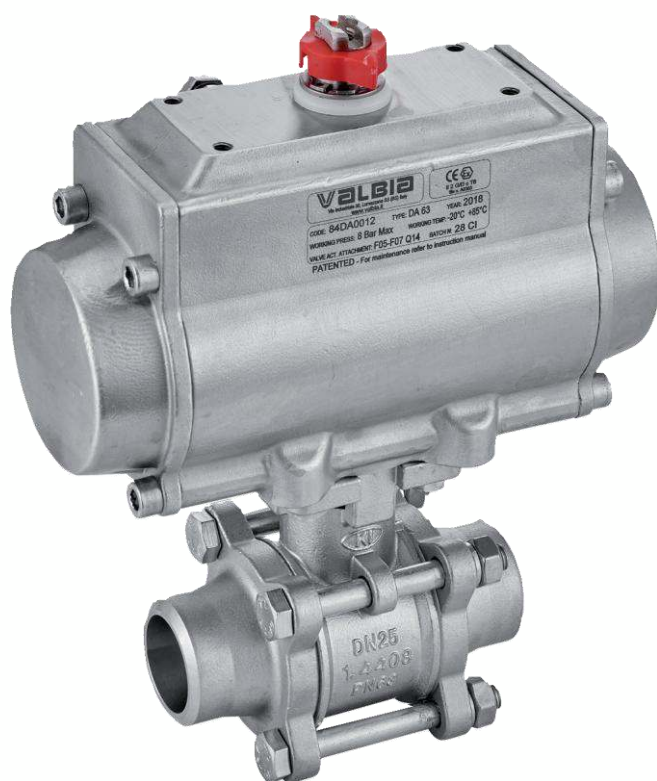

Specifications

⇒ Valve

Dimensions: DN8 to DN80 (1/4" to 3")

Connection: to be welded (butt welding)

Pressure: PN63 (1000 lbs)

Operating temperature: -29°C to +175°C

Material: 316 or CF8M stainless steel
(for the stainless steel parts that can come into contact with the transported fluid)



⇒ Pneumatic actuator

Air connection: 1/8" (VP50 to VP88) or 1/4" (VP100 to VP200)


Operating pressure: 6 to 8 bar

Operating temperature: -20°C to +85°C

Material: Stainless steel

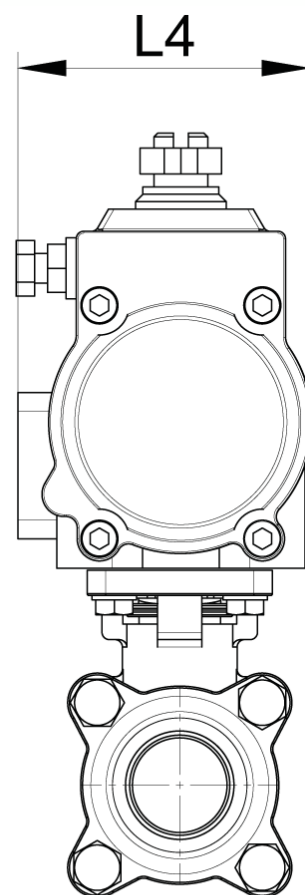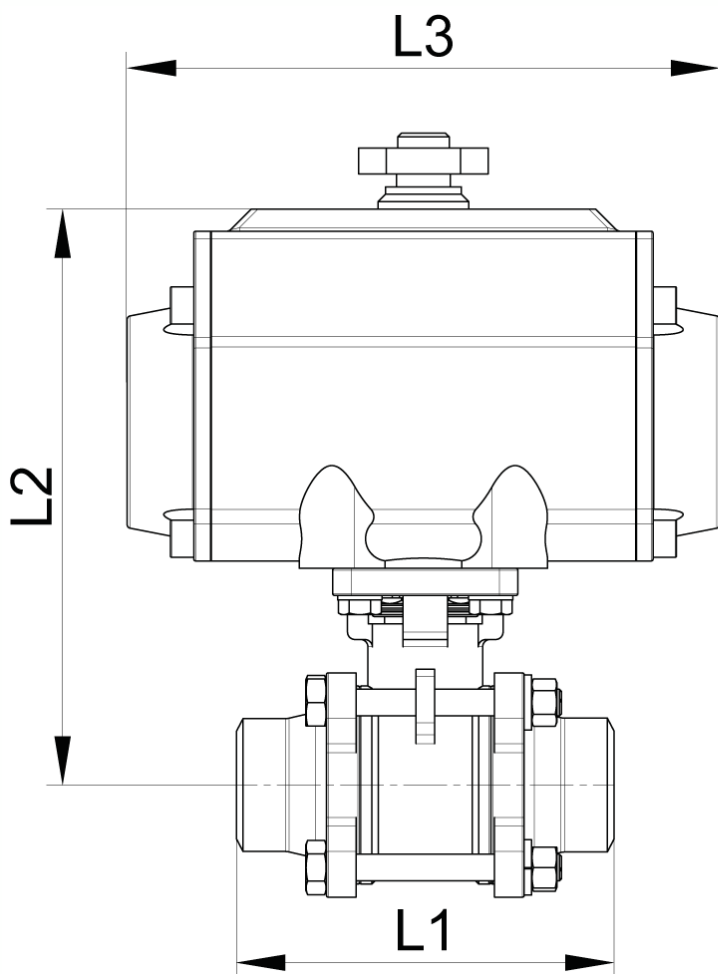

DN (mm)	NB (Inches)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	Weight (kg)	Spring return Part No.	Double-acting type Part No.
8	1/4"	70	128	141	71	2.92	450075-8SE	450075-8DE
10	3/8"	70	128	141	71	2.92	450075-10SE	450075-10DE
15	1/2"	75	128	141	71	2.98	450075-15SE	450075-15DE
20	3/4"	90	146	164	81	4.22	450075-20SE	
20	3/4"	90	135	141	71	3.22		450075-20DE
25	1"	100	156	164	81	4.67	450075-25SE	450075-25DE
32	1 1/4"	110	160	164	81	5.30	450075-32SE	450075-32DE
40	1 1/2"	125	188	210	95	8.25	450075-40SE	450075-40DE
50	2"	150	194	210	95	9.90	450075-50SE	450075-50DE
65	2 1/2"	190	244	275	123	20.20	450075-65SE	
65	2 1/2"	190	229	241	106	16.80		450075-65DE
80	3"	220	253	275	123	23.50	450075-80SE	450075-80DE

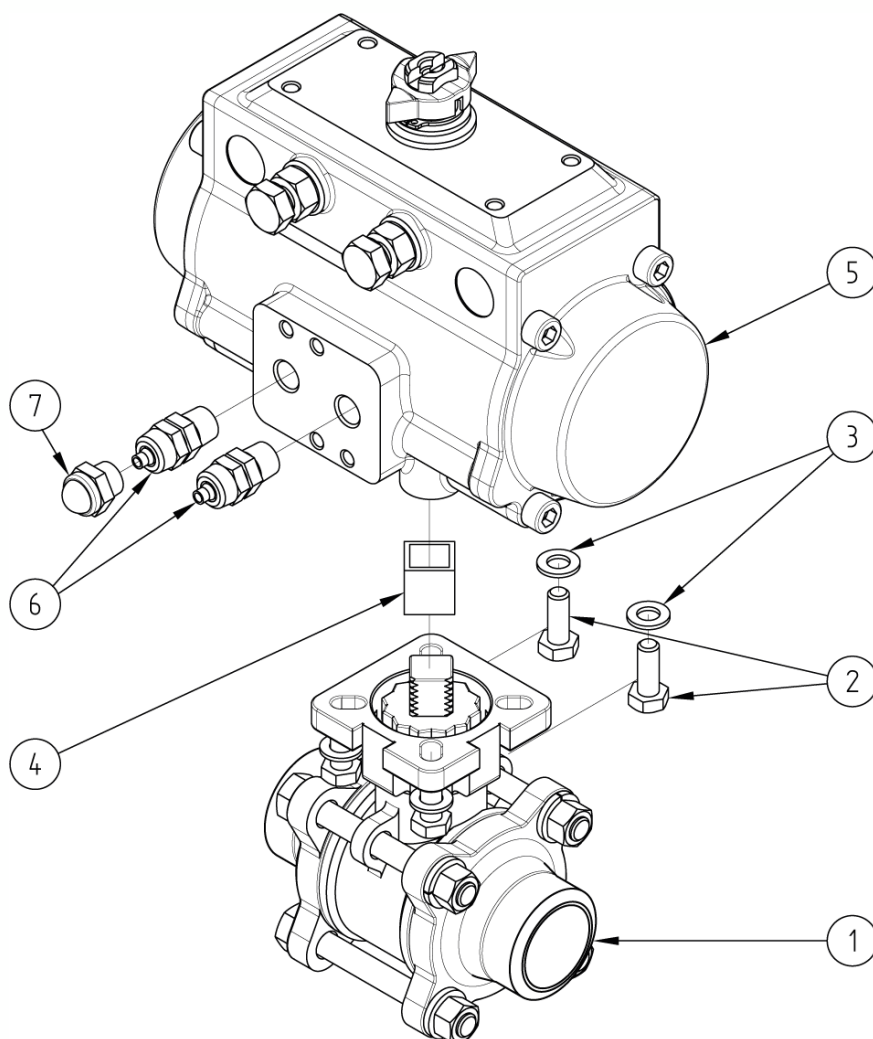

N°	Part Name	Material	Quantity
1	3-PART VALVE (58192)	CF8M	1
2	FIXING BOLT	STAINLESS STEEL	4
3	WASHER	STAINLESS STEEL	4
4	COUPLING	STAINLESS STEEL	0 or 1
5	PNEUMATIC ACTUATOR (50802)	STAINLESS STEEL	1
6	CAPPED PNEUMATIC CONNECTOR	NICKEL-PLATED BRASS	1 (SE*) or 2 (DE**)
7	EXHAUST SILENCER	NICKEL-PLATED BRASS	1 (SE*)

*Spring return pneumatic actuator **Double-acting type pneumatic actuator

You can refer to the following product data sheets for more technical information:

- **58192** : 3-part valve to be welded (butt welding)
- **50802SE** : Spring return pneumatic actuator
- **50802DE** : Double-acting type pneumatic actuator

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.