

Ball valves

Model 50278 Wafer ball valve with ISO mounting plate (58249) and fail-safe electric actuator IP66 (50841)



Specifications

⇒ Valve

Dimensions: DN15 to DN80 (1/2" to 3")

Connection: flanges in accordance with EN 1092-1

Pressure: PN depending on flange dimensions

Operating Temperature: -29°C to +175°C

Material: 316 or CF8M stainless steel

(for the stainless steel parts that can come into contact with the transported fluid)

⇒ Electric actuator

Operating temperature: -10°C to +40°C

Plastic housing IP66


Visual position indicator

Self-regulating anti-condensation heater



Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

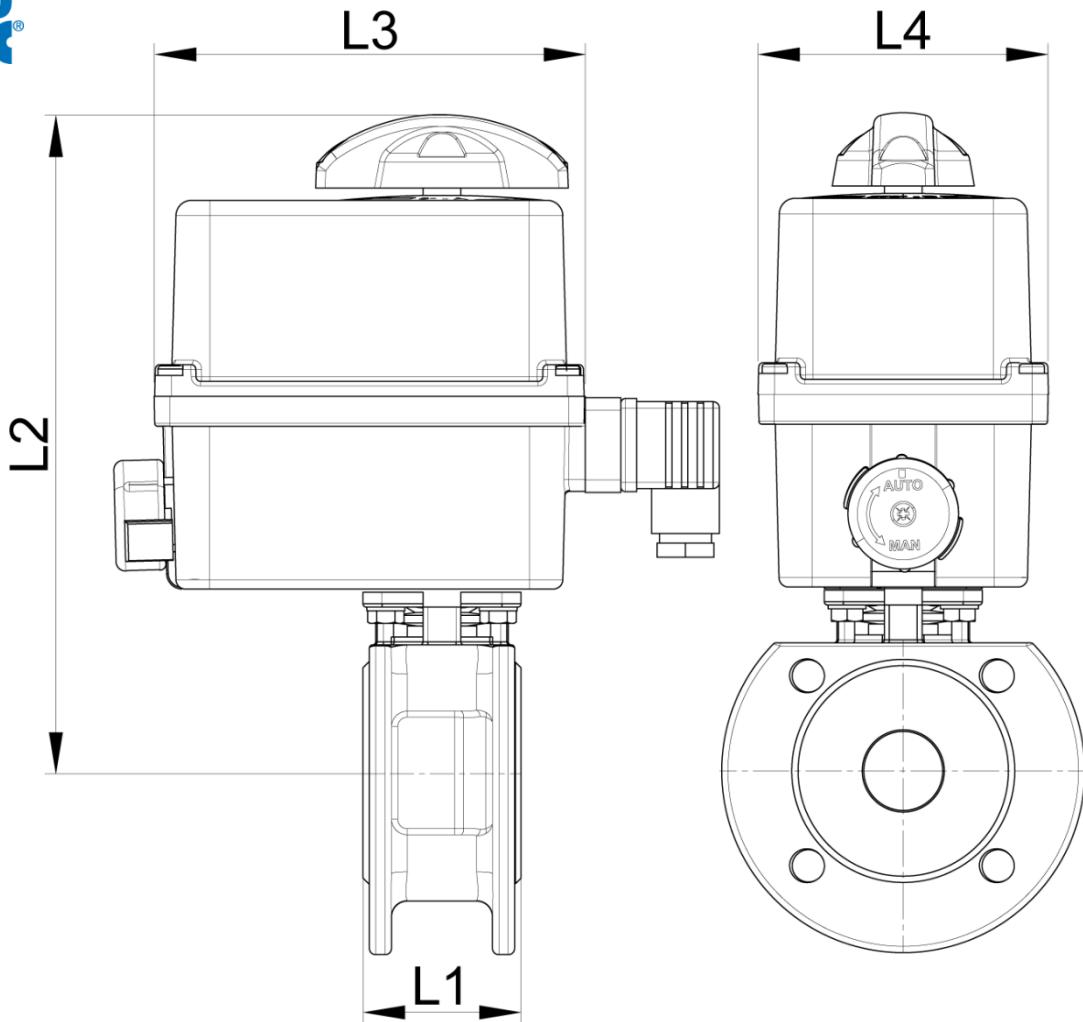

DN (mm)	NB (inches)	PN (bar)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	Opening/ closing time (90°) (s)	Weight (kg)	Part No. 100-230V AC and 100-350V DC	Opening/ closing time (90°) (s)	Part No. 15-30V AC and 12-48V DC
15	1/2"	40	42	194	136	92	11	2.60	450278-15A	11	450278-15B
20	3/4"	40	43	201	136	92	12	2.80	450278-20A	12	450278-20B
25	1"	40	50	211	136	92	12	3.80	450278-25A	12	450278-25B
32	1"1/4	40	60	239	151	128	7	5.80	450278-32A	7	450278-32B
40	1"1/2	40	65	248	151	128	7	7.10	450278-40A	7	450278-40B
50	2"	40	78	254	151	128	12	9.00	450278-50A	12	450278-50B
65	2"1/2	16	110	276	151	128	12	12.40	450278-65A	12	450278-65B
80	3"	16	120	285	151	128	23	17.10	450278-80A	22	450278-80B

Electric actuator with plastic housing with IP66 protection rating.

Visual position indicator. Manual override control with safe clutch disengagement.

Configurable limit switches. Torque limiting device. Anti-condensation heater.

Actuator operating temperature: -10°C to +55°C (except for the fail-safe version: -10°C to +40°C).


Duty cycle: 50%. Number of starts per hour: 150.

Actuator sized for a valve $\Delta P = \text{max. } 16 \text{ bar}$. For $\Delta P > 16 \text{ bar}$, please contact us.

Fail-safe version: The internal fail-safe backup unit (circuit board + battery) makes sure that the valve returns to the closed position if there is a power cut.

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

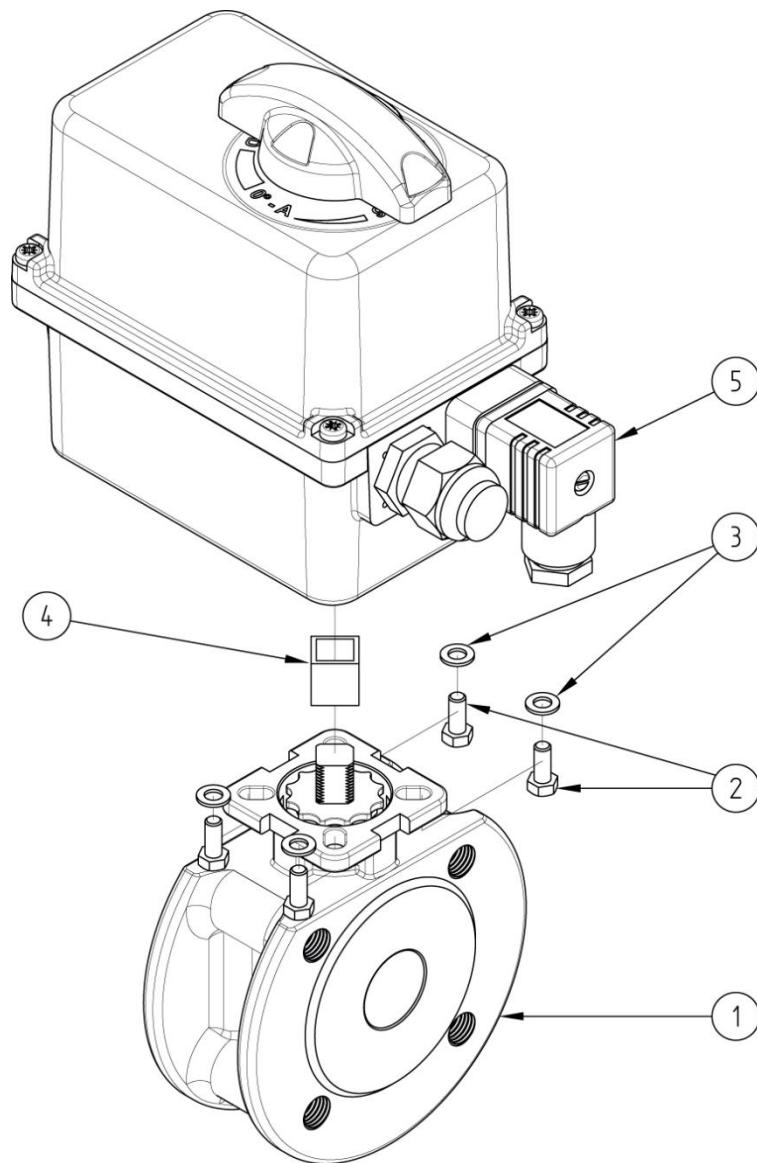

N°	Part Name	Material	Quantity
1	WAFER VALVE (58249)	CF8M	1
2	FIXING BOLT	STAINLESS STEEL	4
3	WASHER	STAINLESS STEEL	4
4	COUPLING	STAINLESS STEEL	0 or 1
5	ELECTRIC ACTUATOR (50841)	PLASTIC	1

You can refer to the following product data sheets for more technical information:

- **58249** : Wafer valve
- **50841** : Fail-safe 1/4 turn (90°) electric actuator - IP66