

Butterfly valves

Model 50758 Butterfly valve with locating holes - cast iron body - stainless steel butterfly - PTFE gasket (58010) and electric actuator IP68 (50844)



Specifications

⇒ Valve

Dimensions: DN50 to DN200 (2" to 8")

Connection: with PN10 or Class 150 flanges

Pressure: PN10

Temperature: -25°C to +180°C

Material: Cast iron body GJS 400 and CF8M butterfly, PTFE sleeve gasket


⇒ Electric actuator

Operating temperature: -20°C to +70°C


Aluminium housing and plastic cap IP68

Visual position indicator

Regulated anti-condensation heater

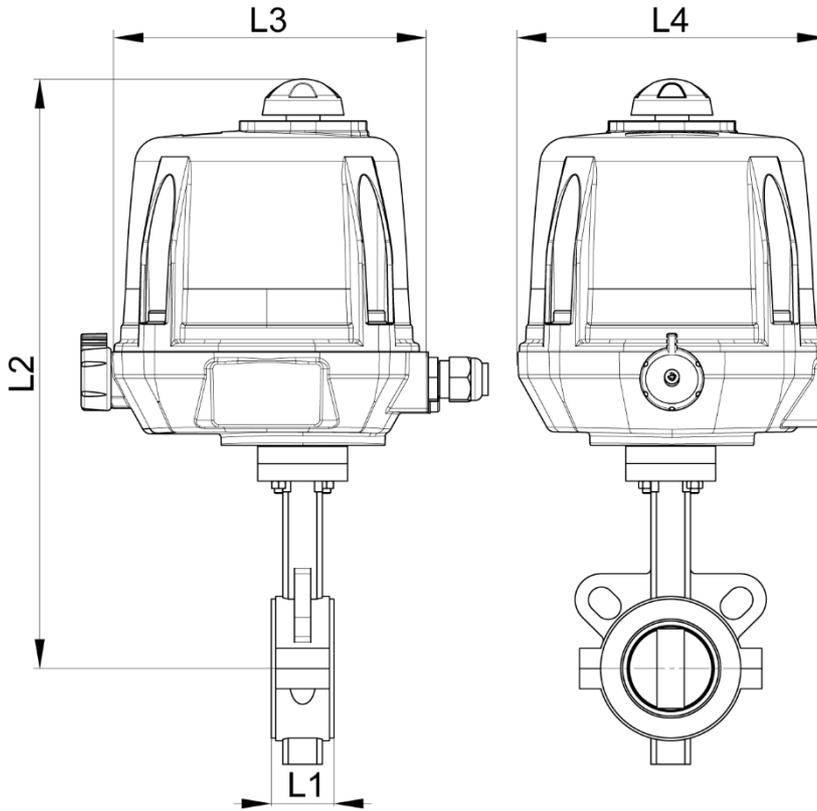


DN50 to DN80

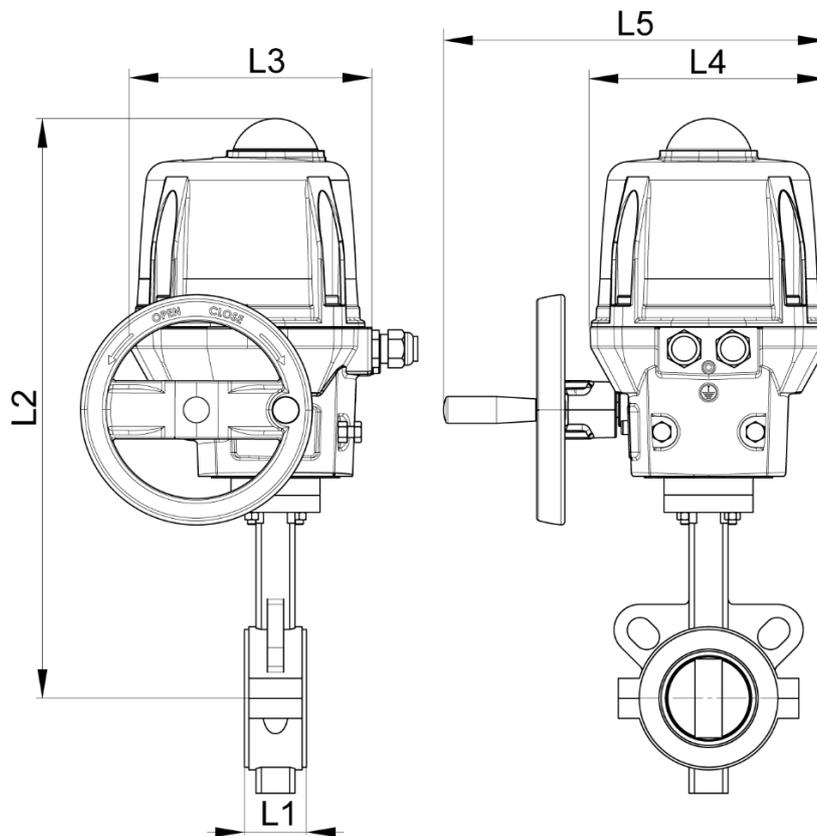

DN100 to DN150

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

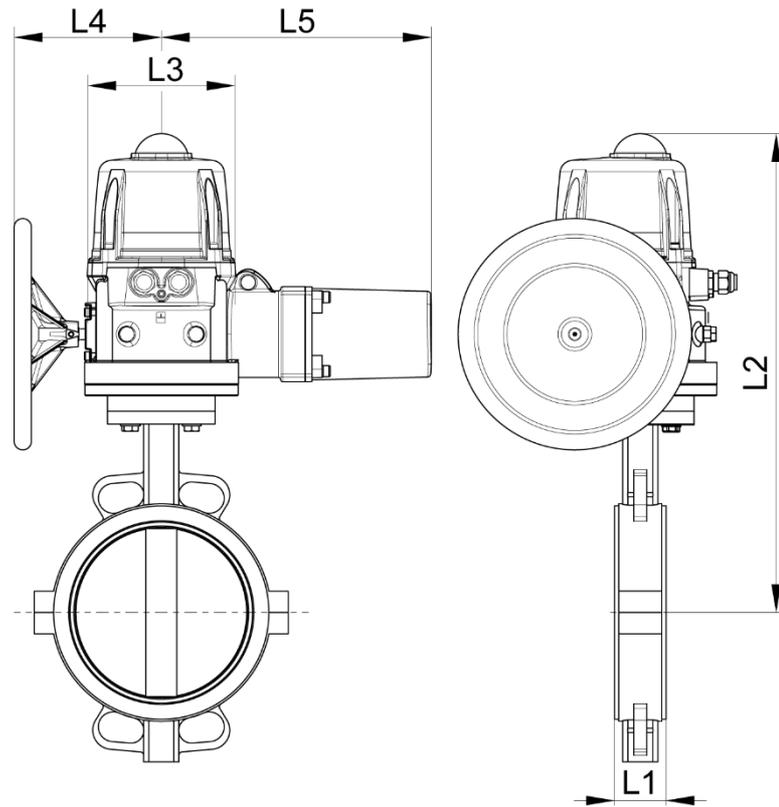


DN200

DN (mm)	NB (inches)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	Opening/ closing time (s)	Weight (kg)	Part number 100-230V 50/60 Hz and 100-350V DC
50	2"	43	340	192	170	X	15	6.00	450758-50A
65	2"1/2	46	346	192	170	X	15	6.50	450758-65A
80	3"	46	353	192	170	X	15	7.10	450758-80A
100	4"	52	374	209	170	275	15	8.80	450758-100A
125	5"	56	452	209	170	275	30	12.30	450758-125A
150	6"	56	465	209	170	275	60	16.30	450758-150A
200	8"	60	502	299	170	483	38	20.30	450758-200A

DN (mm)	NB (inches)	Opening/ closing time (s)	Weight (kg)	Part number 15-30V 50/60 Hz and 12-48V DC	Opening/ closing time (s)	Part number 400V TRI 50/60 Hz
50	2"	15	6.00	450758-50B	10	450758-50C
65	2"1/2	15	6.50	450758-65B	10	450758-65C
80	3"	15	7.10	450758-80B	10	450758-80C
100	4"	15	8.80	450758-100B	10	450758-100C
125	5"	30	12.30	450758-125B	20	450758-125C
150	6"	60	16.30	450758-150B	35	450758-150C
200	8"	-	20.30	-	38	450758-200C

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

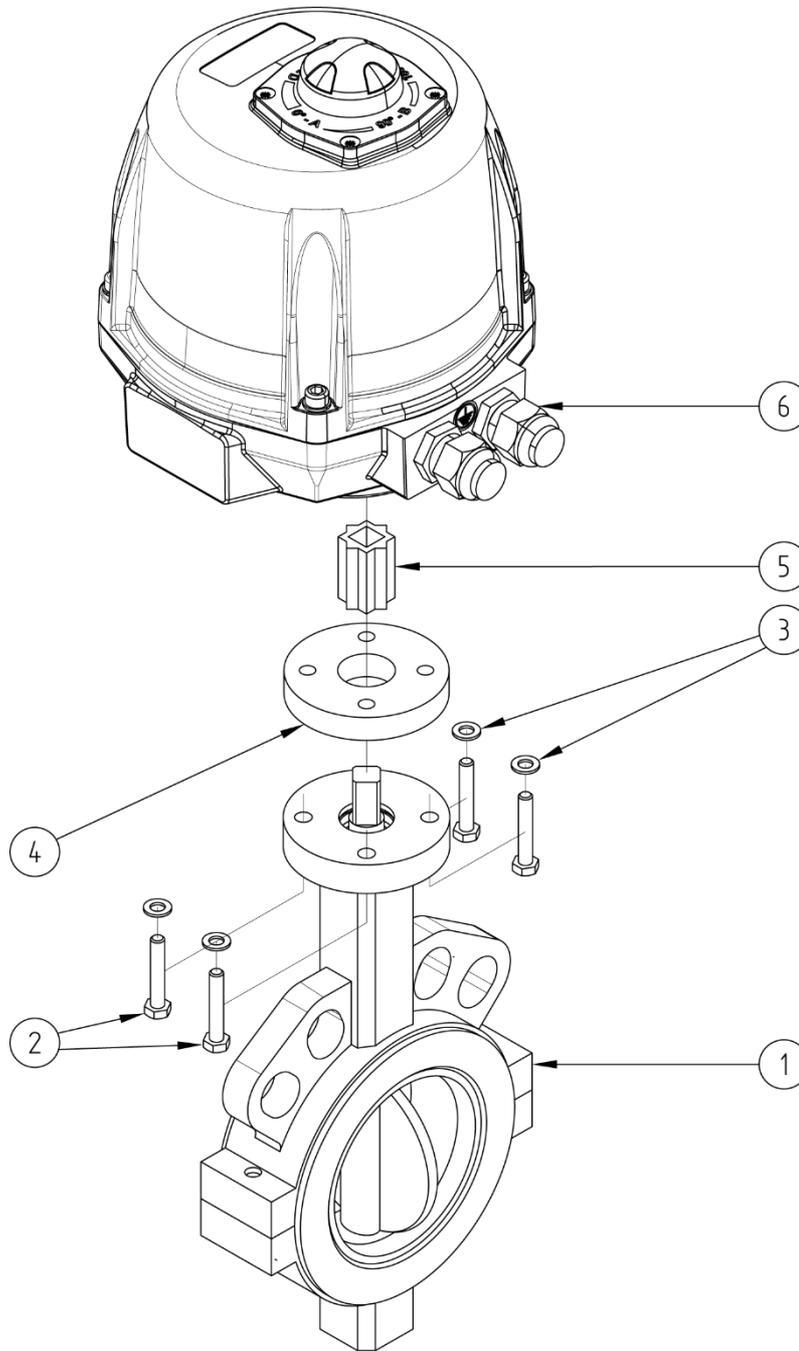

N°	Part Name	Material	Quantity
1	BUTTERFLY VALVE (58010)	GJS400 / CF8M	1
2	FIXING BOLT	STAINLESS STEEL	4
3	WASHER	STAINLESS STEEL	4
4	ADAPTER PLATE	STAINLESS STEEL	0 or 1
5	COUPLING	STAINLESS STEEL	1
6	ELECTRIC ACTUATOR (50844)	PLASTIC	1

You can refer to the following product data sheets for more technical information:

- **58010:** Butterfly valve with locating holes
- **50844:** 1/4 turn (90°) electric actuator - IP68

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.