

Butterfly valves

Model 50760 Butterfly valve with locating holes - cast iron body - stainless steel butterfly - PTFE gasket (58010) and electric actuator IP68 with positioning unit (50846)



Specifications

⇒ Valve

Dimensions: DN50 to DN200 (2" to 8")

Connection: with PN10 or Class 150 flanges

Pressure: PN10

Temperature: -25°C to +180°C

Material: Cast iron body GJS 400 and CF8M butterfly, PTFE sleeve gasket


⇒ Electric actuator

Operating temperature: -20°C to +70°C


Aluminium housing and plastic cap IP68

Visual position indicator

Regulated anti-condensation heater

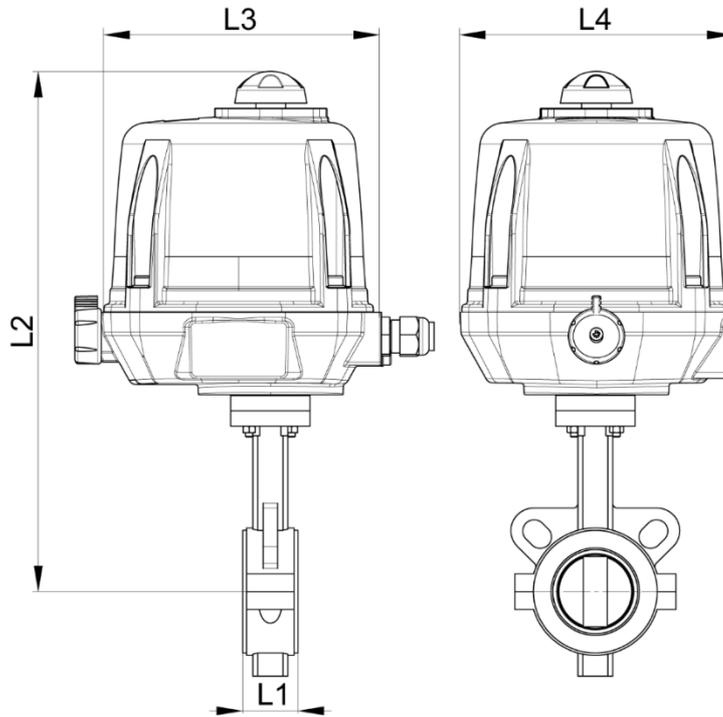

DN50 to DN80

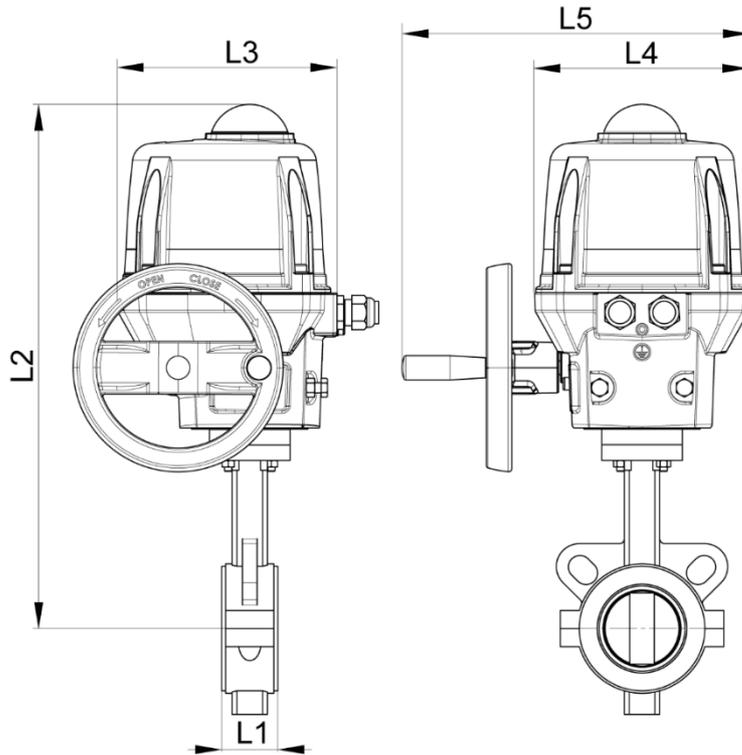


DN100 to DN150

DN (mm)	NB (inches)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	Opening/ closing time (s)	Weight (kg)	Part number 100-230V AC and 100-350V DC	Part number 15-30V 50/60 Hz and 12-48V DC
50	2"	43	355	192	170	X	15	6.20	450760-50A	450760-50B
65	2 1/2"	46	365	192	170	X	15	6.50	450760-65A	450760-65B
80	3"	46	373	192	170	X	20	6.85	450760-80A	450760-80B
100	4"	52	452	209	170	275	30	10.85	450760-100A	450760-100B
125	5"	56	466	209	170	275	60	12.20	450760-125A	450760-125B

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

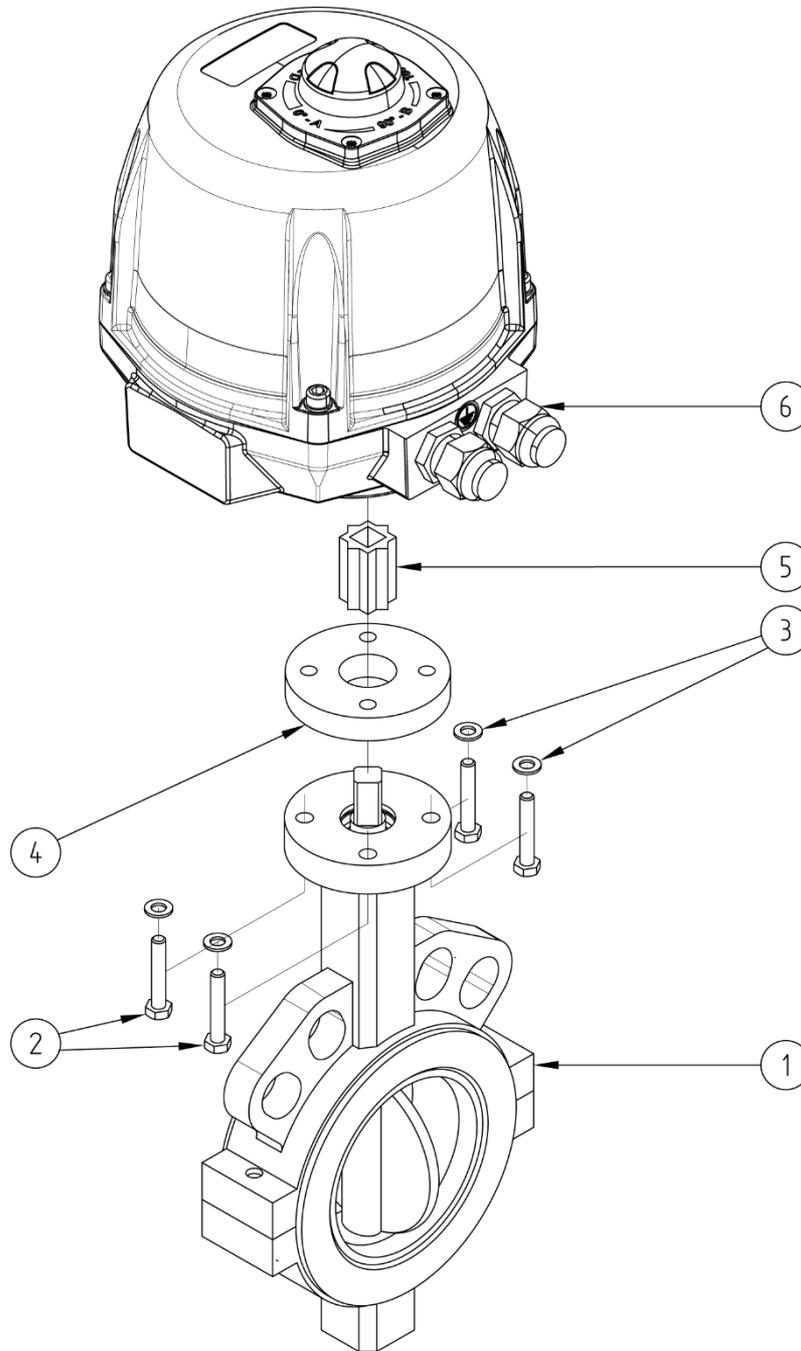

N°	Part Name	Material	Quantity
1	BUTTERFLY VALVE (58010)	GJS400 / CF8M	1
2	FIXING BOLT	STAINLESS STEEL	4
3	WASHER	STAINLESS STEEL	4
4	ADAPTER PLATE	STAINLESS STEEL	0 or 1
5	COUPLING	STAINLESS STEEL	1
6	ELECTRIC ACTUATOR (50846)	PLASTIC	1

You can refer to the following product data sheets for more technical information:

- **58010:** Butterfly valve with locating holes
- **50846:** 1/4 turn (90°) electric actuator with 4/20 mA positioning unit - IP68

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.