

Ball valves


Model 58208 Position raiser with ISO mounting plate for handles or actuators - 304 stainless steel




Specifications

Dimensions: for DN8 to DN150 valves

Supplied with lockable handle and nuts and bolts

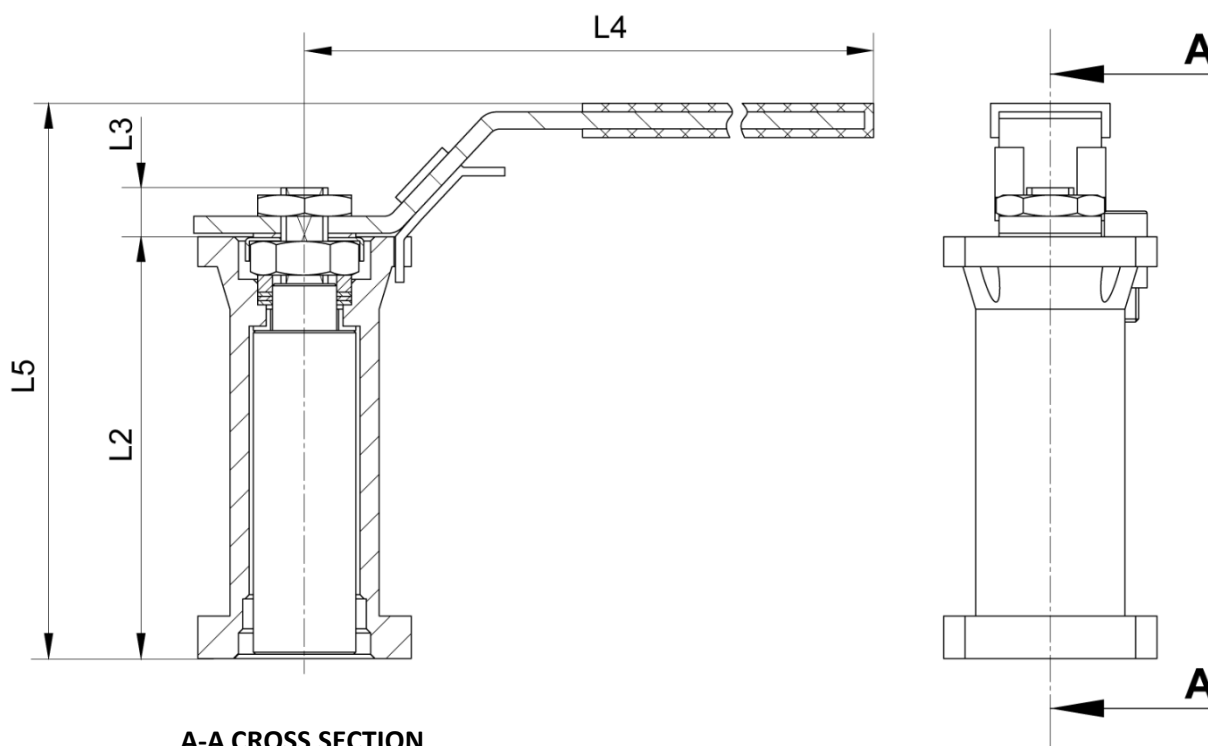

A-A CROSS SECTION

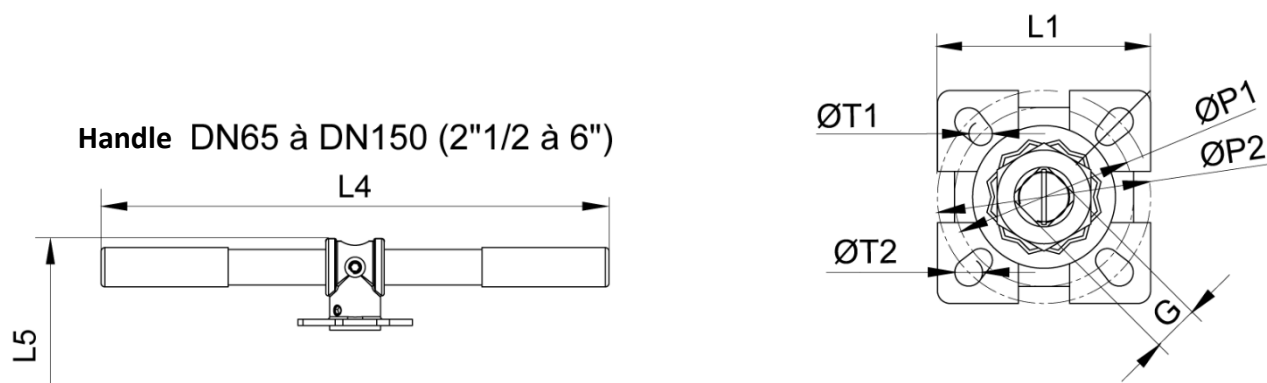


DN valve (mm)	NB valve (inches)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	G (mm)	ØP1 (mm)	ØP2 (mm)	ØT1 (mm)	ØT2 (mm)	ISO mounting plate (valve side)	ISO mounting plate (handle side)	Part number
8 to 20	1/4" to 3/4"	42	100	9	150	135	9	36	42	6	6	F04	F03 / F04	458208-1
25 to 32	1" to 1 1/4"	50	100	11	180	135	11	42	50	6	7	F05	F04 / F05	458208-2
40 to 50	1 1/2" to 2"	65	100	14	200	135	14	50	70	7	9	F07	F05 / F07	458208-3
65 to 80	2 1/2" to 3"	92	100	17	300	170	17	70	102	9	11	F10	F07 / F10	458208-4
100	4"	92	100	22	400*	170*	22	-	102	-	11	F10	F10	458208-5
125 to 150	5" to 6"	125	120	27	600*	200*	27	-	102	-	11	F12	F12	458208-6


* positionable tubular handle

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

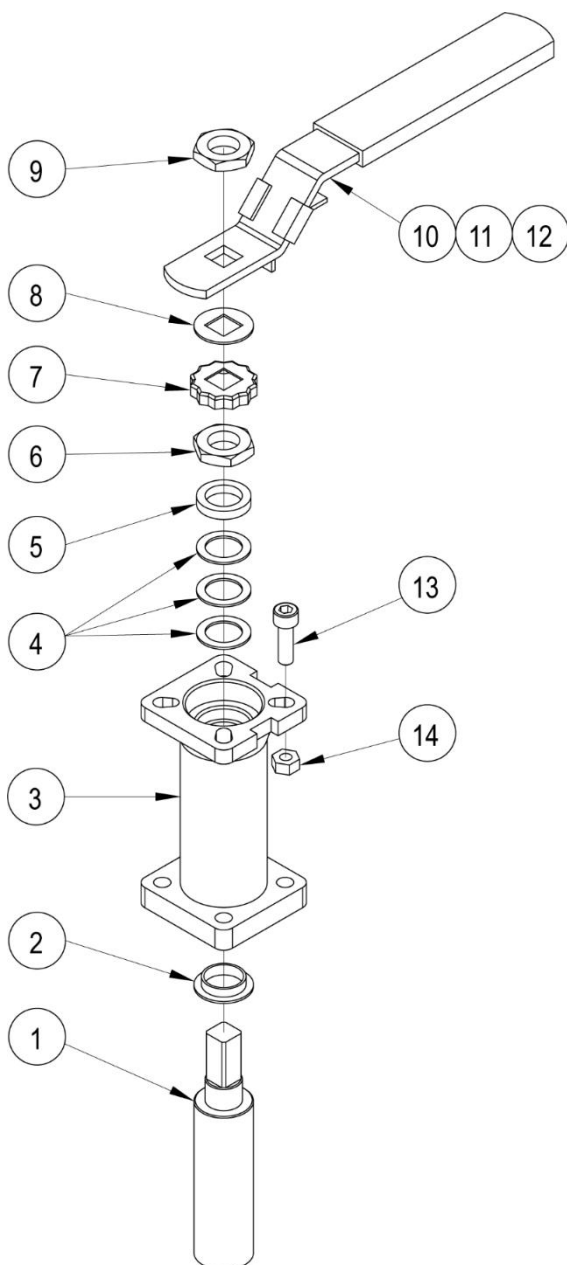

Handle DN 65 - 150 (2"1/2 - 6")

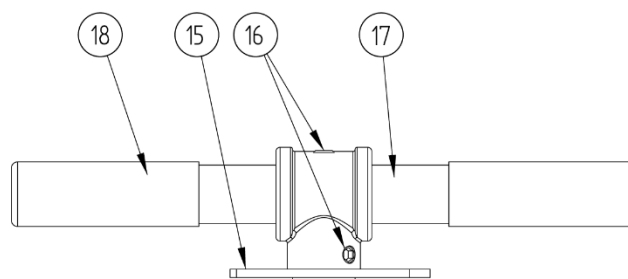

N°	Part Name	Material
1	SHAFT	AISI 304
2	GASKET	PTFE
3	BODY	AISI 304
4	GASKET	PTFE
5	SPACER	AISI 304
6	NUT	A2
7	STOP NUT	AISI 304
8	WASHER	AISI 304
9	NUT	A2
10	LOCKABLE HANDLE	AISI 304
11	LOCKING DEVICE	AISI 304
12	HANDLE COVERING	PLASTIC
13	BOLT	A2
14	NUT	A2
15	HANDLE MOUNTING BASE (DN 65-100)	EN 1.4408
16	SCREW (HANDLE DN 65-100)	A2-70
17	TUBULAR HANDLE (DN 65-100)	Zinc-coated A53
18	HANDLE COVERING (DN 65-100)	PVC

Use

Position raisers for handles and actuators are accessories that can improve accessibility, ergonomics and allow equipment adjustments.

A position raiser is particularly useful when your system has valves that are located in small or hard-to-reach spaces as it moves a valve's handle away from its body so that it is easier to use.

You can also use a handle position raiser to operate a valve handle above the insulation around an insulated piping system. Or you can use a position raiser to move a handle further away from a piping system carrying high temperature fluids - as a handle located directly on the piping system will become too hot to use.


This position raiser is compatible with any type of valve with an ISO mounting plate.

The position raiser is sold with 4 bolts and nuts so that it can be assembled onto a valve.
The position raiser also comes with a lockable handle.

This product is compatible with the following Béné Inox valve models:

- Model **58183**
- Model **58191**
- Model **58192**
- Model **58213/ 58217**
- Model **58229/ 58227**
- Model **58249**
- Model **58259**
- Model **58268**
- Model **58269**
- Model **58308**
- Model **58463**
- Model **58471**
- Model **58472**

Assembly and maintenance instructions

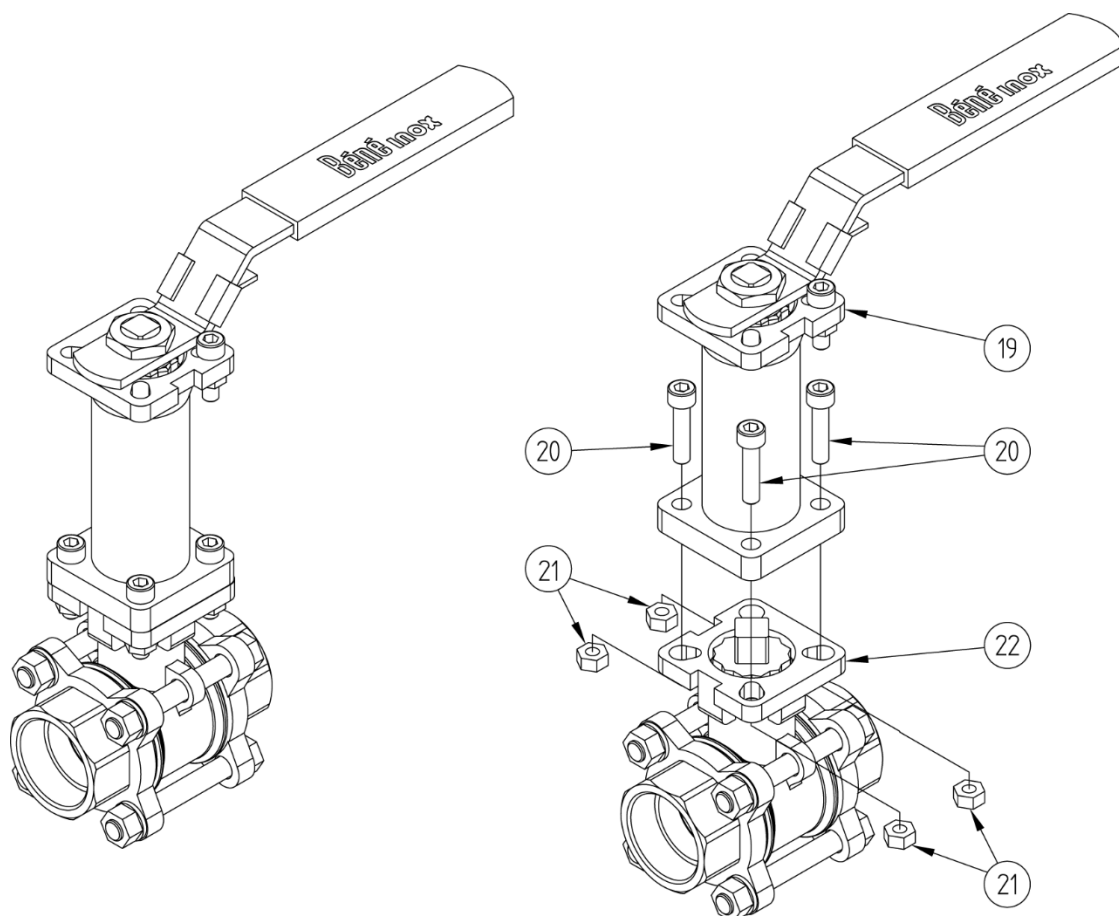

N°	Part Name	Material
19	POSITION RAISER	AISI 304
20	BOLT	A2
21	NUT	A2
22	VALVE + MOUNTING PLATE	-

Installation

The position raiser **19** can be used with any valve that has an ISO mounting plate. You must remove the valve's original handle to install a position raiser. Then, align the valve's mounting plate **22** with the position raiser's **19** mounting plate.

Next, insert the bolts **20** through both of these mounting plates and fix them tightly into place using the nuts **21**.