

Cleaning nozzle



CE 1935/2004

Model 8083**Intense flat jet cleaning nozzle - Controlled rotation - 316L stainless steel - 632**

Specifications

Connection: Pin joint 1/2" or 3/4",
female 3/8" or 3/4"

Pressure: 3 to 5 bar

Max. Temperature: +95°C

Material: 316 stainless steel or PEEK



(for the parts that can come into contact with
the transported fluid)

On request:

- Spray angle 180° top and 180° bottom
- NPT connection
- ATEX version



Pin




270° Spray - Top


Connection:	D (mm)	L (mm)	Max. tank Ø (m)	Flow rate at 5 bar (l/min)	Weight (kg)	Part number
Pin 1/2"	12.8	148	3.5	40	0.70	480831-050G
Female 3/8" BSP	44	146	3.5	40	0.70	480831-038F
Pin 3/4"	19.2	164	8.0	213	0.70	480831-075G
Female 3/4" BSP	44	139	8.0	213	0.70	480831-075F

270° Spray - Bottom

Connection:	D (mm)	L (mm)	Max. tank Ø (m)	Flow rate at 5 bar (l/min)	Weight (kg)	Part number
Pin 1/2"	12.8	148	3.5	40	0.70	480832-050G
Female 3/8" BSP	44	146	3.5	40	0.70	480832-038F
Pin 3/4"	19.2	164	8.0	213	0.70	480832-075G
Female 3/4" BSP	44	139	8.0	213	0.70	480832-075F



Female



360° Spray

Connection:	D (mm)	L (mm)	Max. tank Ø (m)	Flow rate at 5 bar (l/min)	Weight (kg)	Part number
Pin 1/2"	12.8	148	3.5	40	0.70	480835-050G
Female 3/8" BSP	44	146	3.5	40	0.70	480835-038F
Pin 3/4"	19.2	164	8.0	213	0.70	480836-075G
Female 3/4" BSP	44	139	8.0	213	0.70	480836-075F

Washing class: 4

You can install the cleaning nozzle in any direction (e.g. horizontally, vertically, at 45° etc.)

This nozzle complies with the FDA and EC Directive 1935/2004

Material that can come into contact with the transported fluids: PEEK - PTFE

- Zirconium oxide - EPDM

Recommended pressure: 3 to 5 bar

Flow rate at 5 bar: 40 to 213 l/min Max. allowed

temperature: 95°C

Recommended filtration level: 0.3mm mesh

Pin connection dimensions comply with ASME BPE The 316L

stainless steel pin is supplied with the nozzle

These flat jets allow optimal cleaning in record time

On request:

- Spray angle 180° top and 180° bottom

- Rotation control sensor

- NPT connection

- Other connection dimensions

- ATEX version

- You can optimise water use by choosing different max. tank Øs:

4m, 6m, 7m and 7.5m

Assembly and maintenance instructions

Installation

You can install the nozzle in any position.


Check that there is enough space for the nozzle head to rotate freely and to carry out maintenance operations where you are planning to install the nozzle.

You must install a filter element in the piping that takes fluid into the cleaning nozzle.
You must use a maximum mesh size of 0.3mm/50 mesh.

Check that all piping is perfectly aligned and that the piping support structure is dimensioned so that the nozzle is not subject to any external stresses. The piping support structure must only support the pipes, not the nozzle.

Pressure test the installation according to the relevant standards (e.g. EN 12266-1), but do not exceed the nozzle's specifications.

Optimal cleaning according to tank diameter

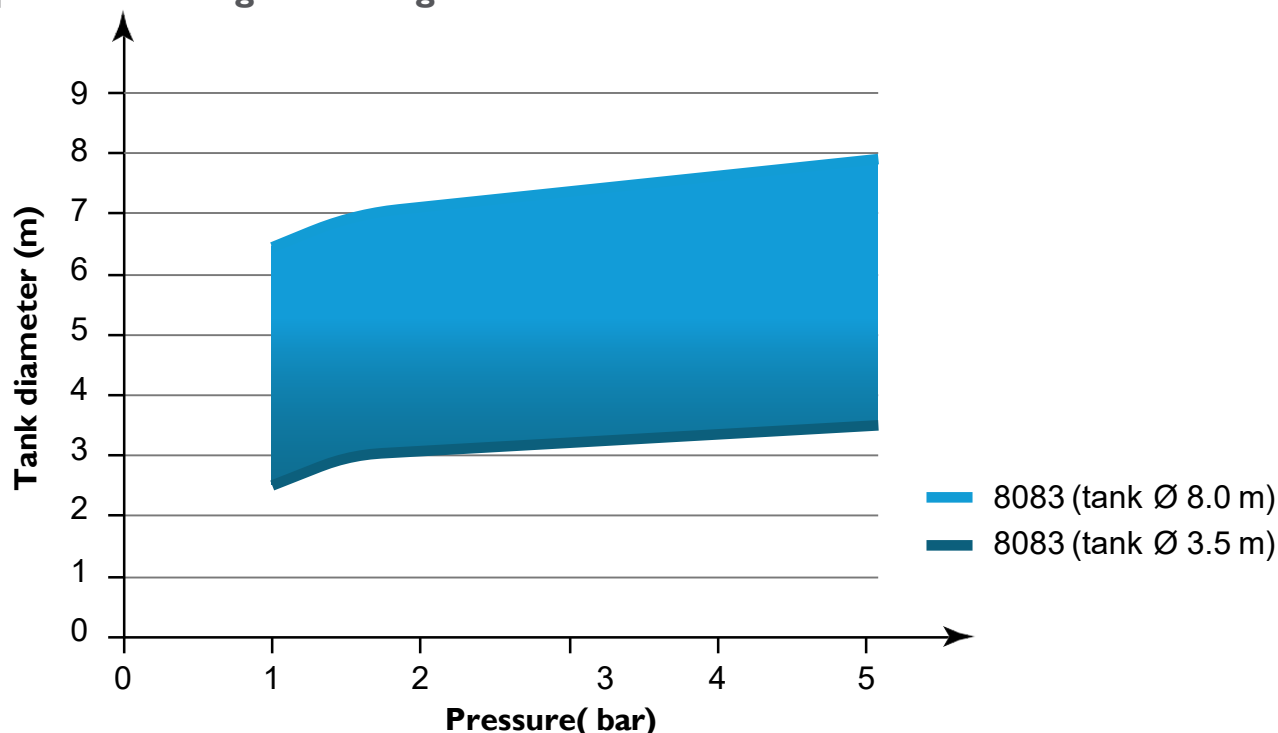

Maintenance

The nozzle does not require any specific maintenance if it is used in normal operating conditions.