

Butterfly valves

Model 50752 Butterfly valve with locating holes - cast iron body - stainless steel butterfly - PTFE gasket (58010) and electric actuator IP65 (50835)



Specifications

⇒ Valve

Dimensions: DN50 to DN150 (2" to 6")

Connection: with PN10 or Class 150 flanges

Pressure: PN10


Temperature: -25°C to +180°C

Material: Cast iron body GJS 400 and CF8M butterfly, PTFE sleeve gasket

⇒ Electric actuator

Operating temperature: -10°C to +50°C

Material: Plastic

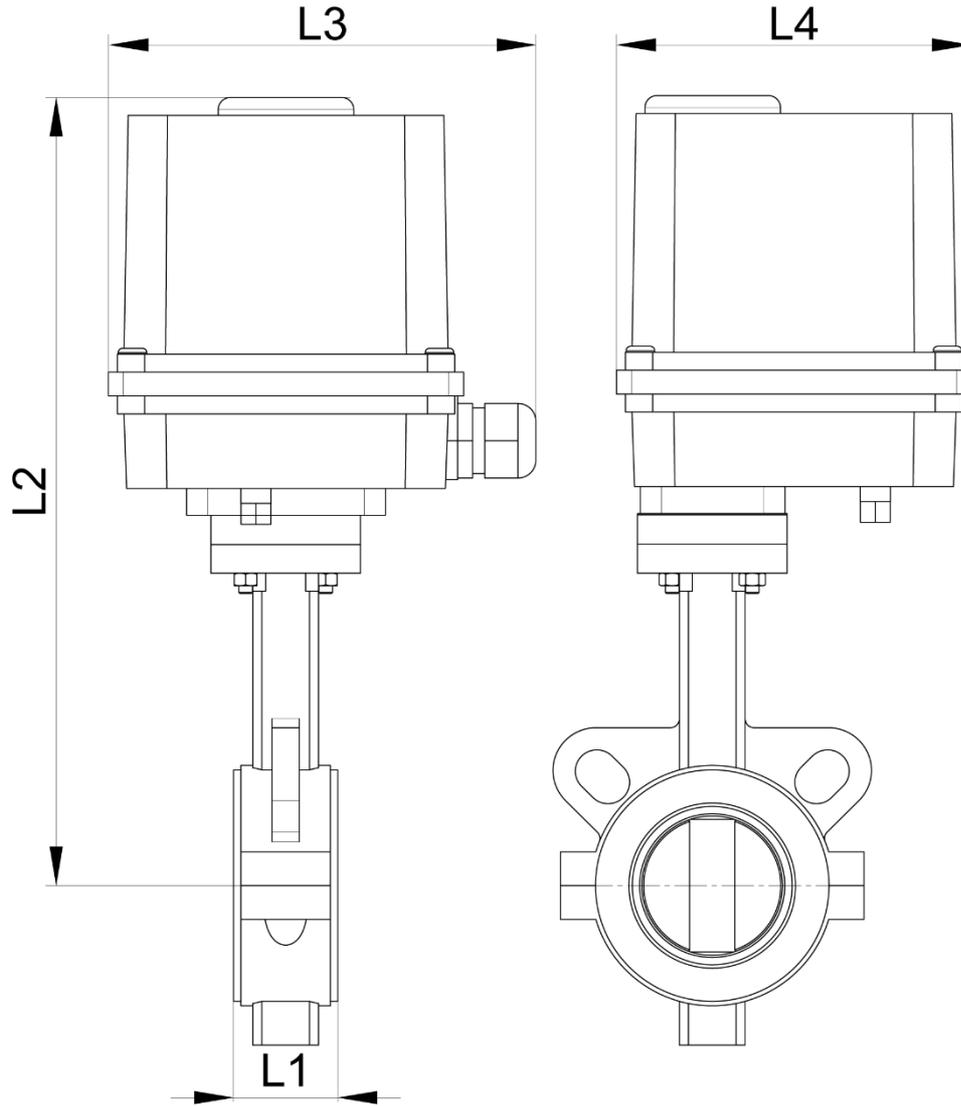


DN (mm)	NB (inches)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	Opening/ closing time (s)	Weight (kg)	Part number 230V 50Hz
50	2"	43	297	143	118	10	4.30	450752-50A
65	2"1/2	46	307	143	118	10	4.60	450752-65A
80	3"	46	315	143	118	10	4.95	450752-80A
100	4"	52	361	204	165	8	9.55	450752-100A
125	5"	56	424	204	182	8	13.70	450752-125A
150	6"	56	444	204	182	8	15.20	450752-150A

DN (mm)	NB (inches)	Opening/ closing time (s)	Part number 24V 50Hz	Opening/ closing time (s)	Part number 24V DC
50	2"	15	450752-50B	16	450752-50C
65	2"1/2	15	450752-65B	16	450752-65C
80	3"	15	450752-80B	16	450752-80C

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

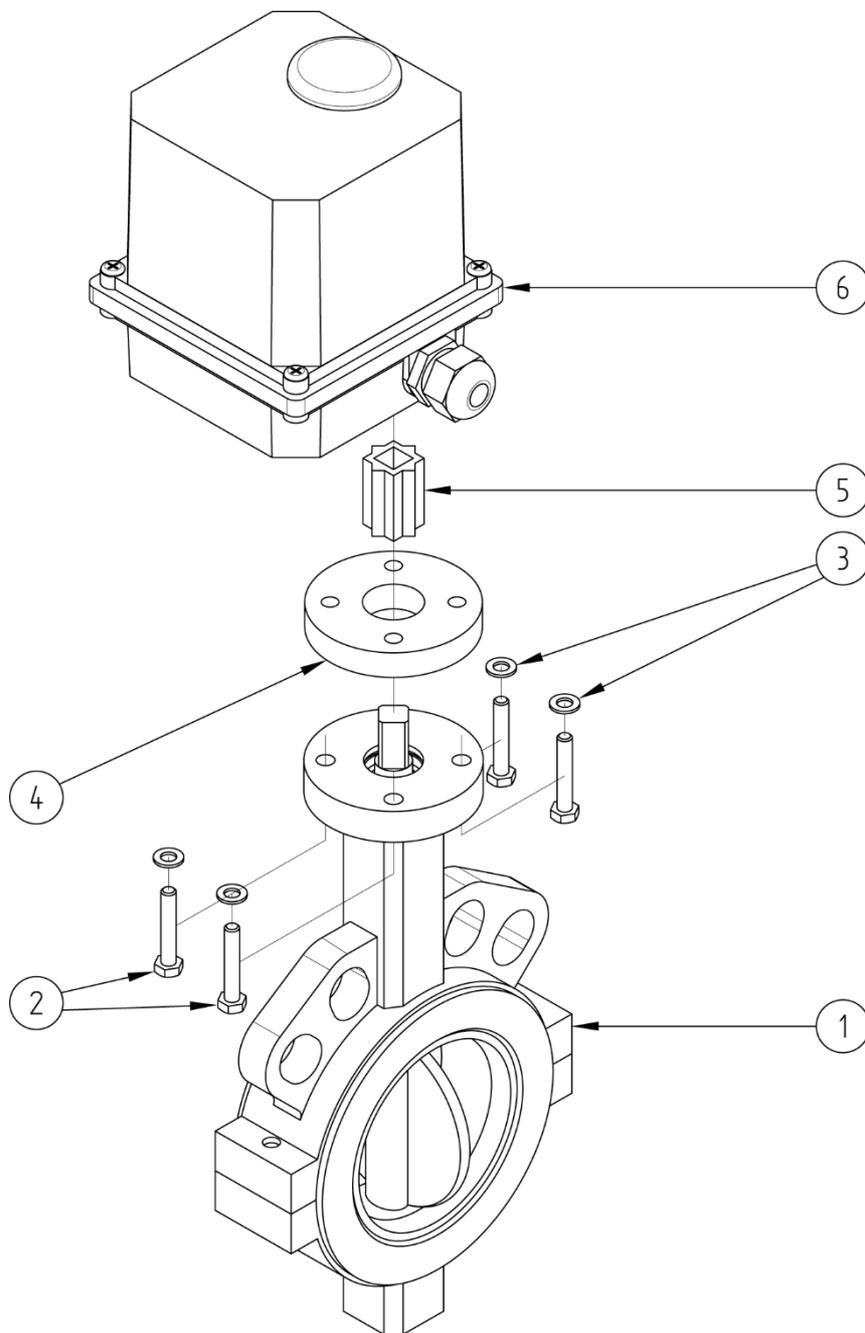

N°	Part Name	Material	Quantity
1	BUTTERFLY VALVE (58010)	GJS400 / CF8M	1
2	FIXING BOLT	STAINLESS STEEL	4
3	WASHER	STAINLESS STEEL	4
4	ADAPTER PLATE	STAINLESS STEEL	1
5	COUPLING	STAINLESS STEEL	1
6	ELECTRIC ACTUATOR (50835)	PLASTIC	1

*Spring return pneumatic actuator **Double-acting type pneumatic actuator

You can refer to the following product data sheets for more technical information:

- **58010:** Butterfly valve with locating holes
- **50835:** Electric actuator

Béné Inox – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – www.bene-inox.com – bene@bene-inox.com

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.