

# Butterfly valves

**Model 50759** Butterfly valve with locating holes - cast iron body - stainless steel butterfly - PTFE gasket (58010) and fail-safe electric actuator IP68 (50845)



## Specifications

### ⇒ Valve

**Dimensions:** DN50 to DN200 (2" to 8")

**Connection:** with PN10 or Class 150 flanges

**Pressure:** PN10

**Temperature:** -25°C to +180°C

**Material:** Cast iron body GJS 400 and CF8M butterfly, PTFE sleeve gasket


### ⇒ Electric actuator

**Operating temperature:** -10°C to +40°C


Aluminium housing and plastic cap IP68

Visual position indicator

Regulated anti-condensation heater

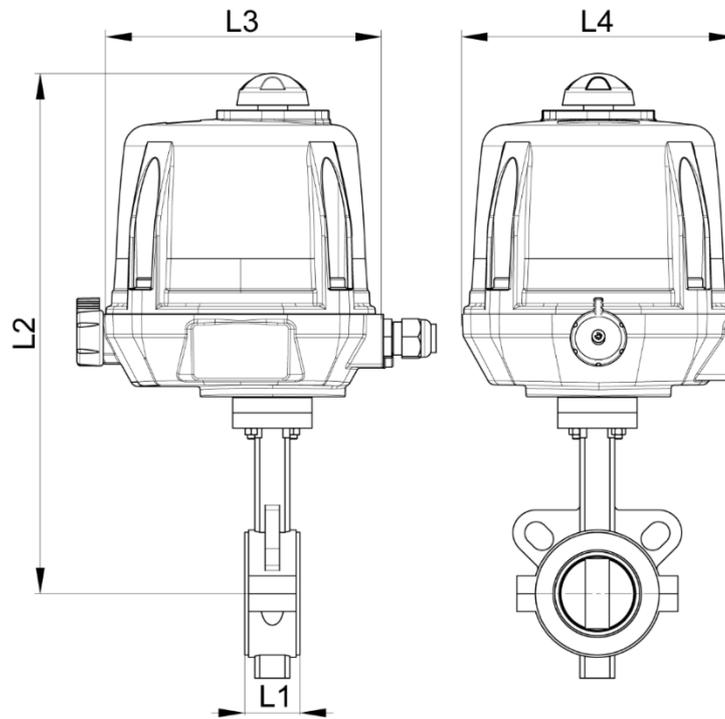

**DN50 to DN80**

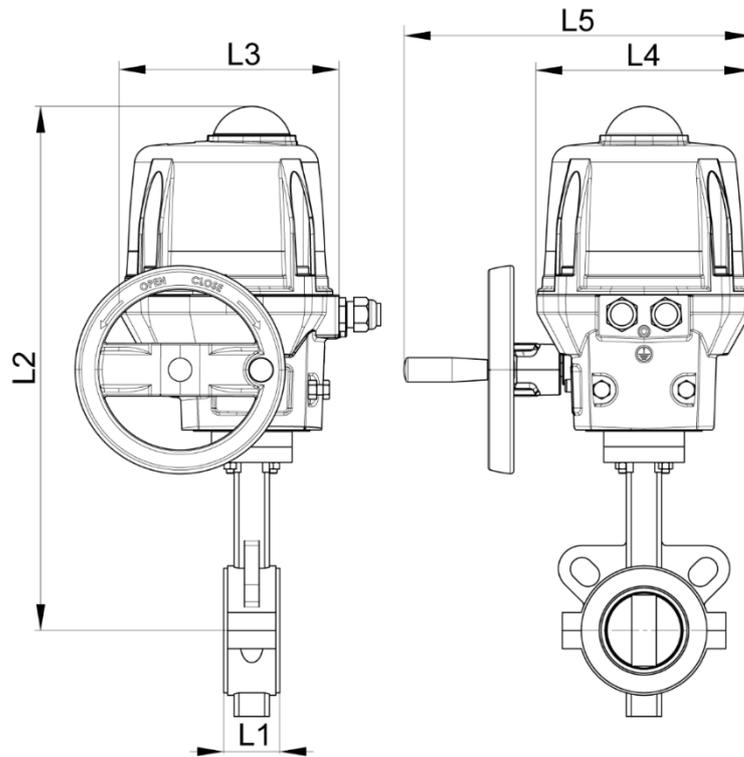


**DN100 to DN150**

DN (mm)	NB (inches)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	Opening/ closing time (s)	Weight (kg)	Part number 100-230V AC and 100-350V DC	Part number 15-30V 50/60 Hz and 12-48V DC
50	2"	43	340	192	170	X	7	6.20	450759-50A	450759-50B
65	2"1/2	46	346	192	170	X	15	6.50	450759-65A	450759-65B
80	3"	46	353	192	170	X	15	6.85	450759-80A	450759-80B
100	4"	52	374	209	170	275	20	10.85	450759-100A	450759-100B
125	5"	56	452	209	170	275	15	12.20	450759-125A	450759-125B
150	6"	56	465	209	170	275	30	16.30	450759-150A	450759-150B

**Béné Inox** – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287  
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – [www.bene-inox.com](http://www.bene-inox.com) – [bene@bene-inox.com](mailto:bene@bene-inox.com)

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.

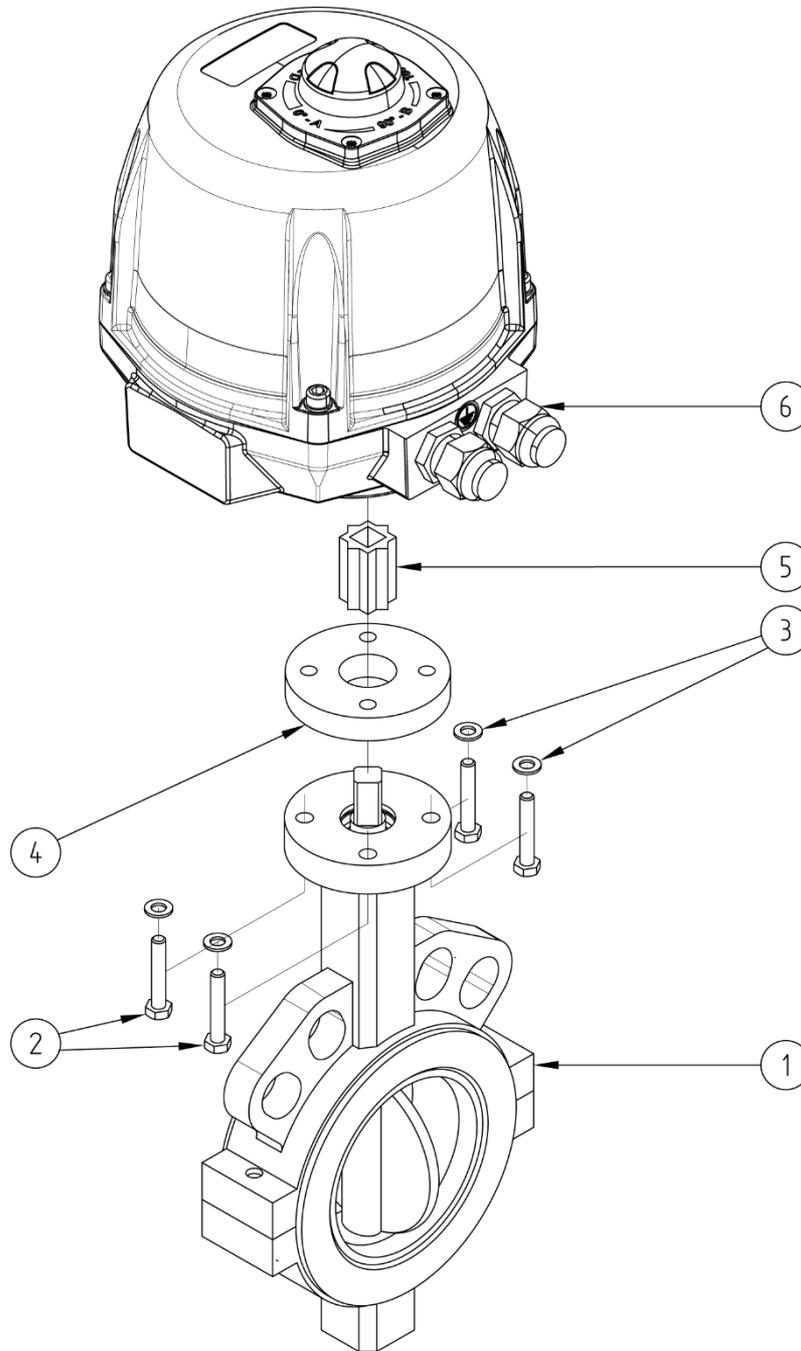

N°	Part Name	Material	Quantity
1	BUTTERFLY VALVE (58010)	GJS400 / CF8M	1
2	FIXING BOLT	STAINLESS STEEL	4
3	WASHER	STAINLESS STEEL	4
4	ADAPTER PLATE	STAINLESS STEEL	0 or 1
5	COUPLING	STAINLESS STEEL	1
6	ELECTRIC ACTUATOR (50845)	PLASTIC	1

You can refer to the following product data sheets for more technical information:

- **58010:** Butterfly valve with locating holes
- **50845:** 1/4 turn (90°) fail-safe electric actuator - IP68

**Béné Inox** – 11 chemin de la Pierre Blanche – 69800 SAINT-PRIEST – S.A.S with 240 000 € share capital – SIREN N° 311 810 287  
Tel. N°: +33 (0)4 78 90 48 22 – Fax N°: +33 (0)4 78 90 69 59 – [www.bene-inox.com](http://www.bene-inox.com) – [bene@bene-inox.com](mailto:bene@bene-inox.com)

Technical information, illustrations and photographs are provided for information only, they are not contractual. Some may vary according to the tolerances accepted in the profession and the applicable standards. All instructions for use, disassembly and maintenance are recommendations only. These could also vary depending on product usage conditions, its installation environment and purchaser requirements – of which the purchaser alone is responsible for their definition.